



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

MEDICAL EQUIPMENT

WWW.AMORET.CO.ZA



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

CONTACT DETAILS

TEL 013 244 2119
FAX 086 528 7895
CELL 072 446 4043

STEFUS@AMORET.CO.ZA

3 BOSBERG CRESCENT,
AERORAND, MIDDELBURG,
MPUMALANGA, SOUTH AFRICA

POSTNET SUITE MW177
PRIVATE BAG X1838
MIDDELBURG, 1050

WWW.AMORET.CO.ZA



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS



INDEX

AUTOPSY SAWS	3
BATTERIES	3
BLOOD / FLUID WARMERS	3
BODY BAGS AND SHROUDS	4
CHART PAPER	4
CENTRAL STERILE SERVICES DEPARTMENT (CSSD)	5
CTG / FETAL MONITORING	5
DEFIBRILLATORS	6
DIAGNOSTIC SETS	6
ECGs	7
ENDOSCOPES	8
EXAMINATION LIGHTS	8
FIRST AID & EMERGENCY EQUIPMENT	9
FETAL DOPPLERS	9
GEL POSITIONING PADS	10
HAEMOGLOBINOMETERS	10
HEADLIGHTS	11
HOSPITAL FURNITURE	11
HOSPITAL HOLLOWWARE	12
INCUBATORS	12
INFANT WARMERS	12
LARYNGOSCOPES	13
MEDICAL & SURGICAL INSTRUMENTS	13
NEBULISERS	14
ORTHOPAEDIC IMPLANTS	14
PATIENT CARE UTENSILS	15
PATIENT MONITORS	15
PHOTIZO	16
PHOTOTHERAPY	16
PHYSIOTHERAPY EQUIPMENT	17
PLASTER SAWS / CUTTERS	17
PUMPS	18
REFRIGERATORS & FREEZERS	18
RESUSCITATORS	19
SCALES	20
SPARE PARTS	22
SPHYGMOMANOMETERS	22
SPIROMETERS	24
STERILIZERS / AUTOCLAVES	24
STETHOSCOPES	25
SUCTION UNITS	26
THEATRE LIGHTS	27
THEATRE TABLES & ACCESSORIES	28
THERMOMETERS	29
ULTRASOUND / SONAR	29
URINE ANALYZER	30
WHEELCHAIRS	30
X-RAY EQUIPMENT	31

AUTOPSY SAWS



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

De Soutter



The safe hand piece is fully immersible allowing it to be routinely scrubbed and disinfected after use
Variable speed from zero to maximum operated at the power supply gives optimum cutting efficiency
Degree of protection of saw hand piece against ingress of liquid is IP67 immersible at 1meter
The extractor has five levels of filtration enabling the system to meet the highest health standards

BATTERIES

Batteries



Various types and sizes available

BLOOD / FLUID WARMERS

ET-TF II



ET-TF-II Infusion Fluid Warmer is an indirect heating device (dry heat warmer)
Can be used repeatedly with standard IV infusion tubing set
Portable and easy to use
No special training is required
Setup can be finished in 1 minute at most
Flow rate: 2 - 12ml/min (against temperature span: 25-41°C)
High accurate digital control for temperature
Infusion fluid is regulated automatically to the set temperature in a short time
Saving cost because no special disposable sets are needed
ET-TF-II is just used with standard IV tubing

Fluid Warming Cabinet



External surfaces manufactured from electro-galvanized and epoxy-coated mild steel

Internal surfaces manufactured from brushed grade 304 stainless steel

Easy and reliable operation

Temperature control range: ambient temperature to 40°C (can be adjusted to other preferred settings)

Fitted with an over-temperature sensor and a cut-out switch



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

BODY BAGS AND SHROUDS




Various sizes available

PVC and Vinyl material available

Various types available

CHART PAPER

- A wide variety available on request:
 - Audiology
 - Blood pressure
 - Cardiotocography
 - Electrocardiography
 - Electroencephalography
 - Electromyography
 - Laboratory
 - Spirometry
 - Video printing
 - Etc.

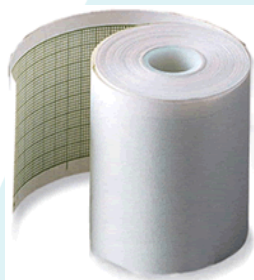



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

CENTRAL STERILE SERVICES DEPARTMENT (CSSD)



A wide variety available on request

- Shelves
- Trolleys
- Instrument trays



CTG / FETAL MONITORING

MD901F



Low-power consumption colour LCD display, graphic display with paper moving and instantaneous digital display
Adopting advanced self-mutuality arithmetic, accurate and stable display
High anti-jamming feature
Multiple printing models, adjustable paper speed and optional printing zones
Well-designed signal doppler probe with high sensitivity and low ultrasonic power
Function of recording monitoring time and fetal movement can be recorded in two ways: figure and graph
Light weight, special handle and hook and also easy to lay on the requisite position
International SMT techniques and stable performance

CMS 800G CTG



Light weight, space-saving, easy to use
8.4" LCD screen, folding 60 degree
Display waveforms and digitals simultaneously
FHR 120-160 normal area highlight
12 hours data and waveform storage and review
FHR upper and lower limit alarm
Twins monitoring function option
High sensitive 9 Elements 1 MHZ Pulse Doppler transducer
Built-in PC Network can be connected to the central monitoring system



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

DEFIBRILLATORS

Defi Express



DefiExpress is a compact, durable, light weight defibrillator
Screen type: high resolution display
Waveform: biphasic
ECG monitoring
Battery: rechargeable, NH-MI, 12V
SpO2 module
Recorder
AED and manual mode

Lifepak 1000



High-capacity battery: power of up to 220 shocks (360J) or approximately 17 hours of monitoring time
Can escalate defibrillation power to an industry leading 360J
cprMAX™ Technology: minimizes CPR interruptions by allowing compressions to continue during AED charging
3 Lead ECG function is available when needed
Large, easy-to-read LCD screen provides more information at a glance
Easy to use

DIAGNOSTIC SETS

Welch Allyn Set



Otoscope, otoscope and ophthalmoscope
Medium battery handle
2 x size 'C' dry cell batteries
All in a compact moulded zippered pouch
Heads interchangeable with any Welch Allyn 3.5v power source
Handle upgradeable to rechargeable

Mark II Premier Set



Opalineotoscope and Optek ophthalmoscope
Battery handle
1 Set of 5 reusable specula diameter 2.5, 3.5, 4.5, 5.5 & 9mm
Spreadable nasal speculum
Curved illuminator
1 Set of laryngeal mirrors no. 3 & 4
Metal tongue depressor
Adapter for disposable tongue depressor
All in a plastic case

Visio 4000 Wall Transformer (Fiber Optic)



Basic Unit equipped with 2 handles
Each handle fitted with a VISIO 2000 otoscope and VISIO 2000 ophthalmoscope
The unit provides a constant 3.5V output voltage independent of mains voltage function
This ensures the right amount of light for each examination
Automatic On/Off switching of the handles
The instrument turns off automatically once the handle is placed in the cradle
Soft start avoids current surge during switch-on phase thus protecting the bulbs from damage
Non-Slip, ergonomic handle design
Handle equipped with a brightness control mechanism for variable regulation of light
Spiral cable enables a working radius of 3 meters

Welch Allyn Wall Mounted



Handles have built in Optisense sensors
Sensors automatically turn a handle on when removed and off again when replaced, aiding in efficiency and optimizes bulb life and performance
Universal handle accepts all Welch Allyn 3.5V instrument heads
Optional third handle module makes expansion easy

ECGs

EKG-1212T



8" TFT colour & touch screen
210mm thermal paper printing
A4 paper direct print (connect with printer)
It has built-in storage with large capacity: 1000 examinations
3, 6 and 12 lead units available
12 Leads ECG simultaneous acquisition, digital signal processor, AC filter, baseline filter and EMG filter of the ECG signals
Simultaneous display of 3/6/ 12 leads ECG waveform and the state of printing mode, sensitivity, speed, filter etc. for easy interpretation
Auto-interpretation conclusion to help reduce doctor's abundance and improve working efficiency
Weight = 3.2kg

ENDOSCOPES



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

Different brands and models can be supplied on request



EXAMINATION LIGHTS

ALI-HL1220-PP



Non-magnetic stainless steel central tubes
Reinforced nylon base with 5 feet
Mobile on twin wheel swivel castors (diameter of 50 mm)
Flexible goose neck arm: 700 mm
Step down transformer 230V, 50W
Halogen Bulb 12 V, 35 W, 10° angle
of emission with UV block
Input voltage: 220/230V 50-60Hz
Knock down construction

Wall Mounted



Illumination Intensity: 40000 Lux
Colour Temperature: 6000-6500 K
Colour rendering index: 75 (Ra)
Spot diameter: 150mm
Light Field Diameter: D 30 cm = 18 cm
Temperature Rise of Field: 0 (°C)
Power Supply: 220 V / 50 Hz. AC
Extension: 75 cm goose neck
Specification of Bulb: LED 6 bulbs (high power)
Brightness Control: Available

FIRST AID & EMERGENCY EQUIPMENT

A wide variety available on request



FETAL DOPPLERS

Sonoline B



Streamline and portable design, compact and light
Large LCD display with backlight
Ergonomic design, easy to use
High sensitivity interchangeable probe
Support 2 MHz, - 8MHz probes
Built-in speaker and sound output interface
Automatic power-off
Real-time FHR display, average FHR display and manual calculation
Battery status indicator and low power indication

GLUCOMETERS

Accu-Chek



Fast, accurate results (± 5 seconds)
Tiny blood sample, if the blood sample is too small, the monitor will detect this and warn you
200-value memory with time, date and result automatically recorded
Integrated data evaluation: from your results stored in memory, your monitor can calculate the average of your blood glucose results over the last 1-2 weeks
Strip expiry warning
Strip-saving feature: if the strip has not been adequately covered, no need to start over and use a new one. Strips can be re-dosed within 15 seconds
It comes with 10 test strips and lancets, lancing device, control, logbook and carrying case
Accu-Chek brand quality and accuracy

GEL POSITIONING PADS

(Catalogue available on request)



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS



Ankle protectors




Body protectors



Bowl shaped head pads



Bowl shaped horseshoe

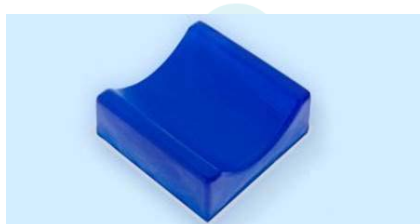

Contoured Supine pads



Dome shaped pads

HAEMOGLOBINOMETERS

(HB METERS)

Hemotest



Sample volume: 10 μ L (one drop of blood)
Strip: single use, with lot specific code per bottle
Speed: results within 30 seconds
Memory capacity: 250 data storage
Range: 4.0 -24.0g/dL
Accuracy: $\geq 95\%$
Automatic: self-calibrating therefore no additional calibration required

HEADLIGHTS



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

Welch Allyn



Weighing approximately 113g, it's one of the most comfortable and lightweight headlights available
Fits inside a shirt pocket and allows complete freedom of movement
Supplies bright, white, shadow-free light for true tissue colour
Solid state lamp has 10,000-hour life expectancy with minimal degradation of light output

MD-750



Ergonomic head band which is padded and fully adjustable in circumference and height
Head band cleaning made easier with removable and washable padding
Double lens precision optical with adjustable holder to focus light point
Illumination axis adjustable over a wide range
3.5mm fiber optic bundle cable with a length of 2.3m
Connector for use with other manufacturer's projectors are available

HOSPITAL FURNITURE

A wide variety available on request





AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

HOSPITAL HOLLOWWARE

Wide variety available on request



INCUBATORS



An incubator is designed for maintaining an infant, especially a premature infant, in an environment of controlled temperature, humidity and oxygen concentration
It has a flexible and push-and-pull humidity and tilt adjuster with large baby-nursing space

Servo-control air temperature or skin temperature by a micro-computer

Built-in integrated sensor box, which includes a skin temperature sensor, airtemperature sensor, oxygen concentration sensor and humidity sensor

Double wall hood, front and back access panel, large mattress, x-ray tray under the bed, heat going out from both side of back and front to increase the inside temperature uniformity

LCD digital display, menu operation, $>37^{\circ}\text{C}$ temperature setting, 48 hours screen of remembering curve

Eight self-check alarms, RS-232 connector, central internet monitoring system to infant, electronic variable resisting and a knockdown storage cabinet

INFANT WARMERS



The infant warmer is designed to stabilise and control an infant's skin temperature

Focused heating with one touch controls ensures ease of use and even irradiance across the mattress

Designed with functionality and performance in mind, it has integrated bassinet, with tilt mechanisms and transport handle

The easily transported fully featured infant warmer is suitable for labour, delivery and intensive care units (NICU)



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

LARYNGOSCOPES

Standard



Single-piece stainless steel construction ensures blade integrity
Removable light pipe and smooth surface design
Blades are upgradeable to fibre optic and repairable at a fraction of the cost of replacement blades

Fiber Optic



Single-piece stainless steel construction ensures blade integrity
Removable light pipe and smooth surface design

MEDICAL & SURGICAL INSTRUMENTS

A wide variety available on request



NEBULISERS

Ultrasonic



Nebulisation capacity: 3ml/min max
Medicine chamber capacity: 100ml
Particle size: 1 - 5µm
Dimensions: 30(L) x 15(W) x 21(H)cm
Weight: 2.8kg
Timer 0~60min

Hospital Grade Ultrasonic



Nebulisation capacity: 4ml/min
Particle size: 1 - 5µm
Medicine cup capacity: 50ml max
Dimensions: 30cm(L) x 18cm(W) x 27cm(H)
Weight: 4.2kg
Timer 0-60mins

ORTHOPAEDIC IMPLANTS



Intramedul Hook End Nail
Compression Plates
Rush Nails





AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

PATIENT CARE UTENSILS



PATIENT MONITORS

CMS70A



Display Mode TFT Screen and LED display
Screen Resolution 320*240
SpO2 Measuring Range 0%~100%, (the resolution is 1%).
Accuracy 70%~100% $\pm 2\%$, Below 70% unspecified.
PR Measuring Range 30bpm~250bpm, (the resolution is 1bpm)
Accuracy ± 2 bpm or $\pm 2\%$ (select larger)

CMS6500



7" TFT Touch Screen, Led Backlight, 800 x 480 pixels
Visual and Audio Alarms, adjustable
Patient Management, Name and age and ID
Network with Central Station Software
Audio volume adjustable form 1 ~ 8 level
Multi-language options: Germany, France, Italian, Turkey, Etc.
Built-in removable and rechargeable lithium battery
UI with Both Keypad and the Touch Screen operation
Memory: Built-in memory or miniSD Memory card. Store more than 1000 pieces of archive

CMS 5000



Compact and portable, allowing for uninterrupted monitoring with built-in battery
High bright LEDS Display of NIBP, SPO2 and pulse rate
High resolution colour LCD for trend tabular and SPO2 waveforms display
Manual / auto / continuous measurement of NIBP
Adjustable audible and visual alarms
Up to 2000 groups NIBP data storage or SPO2 data up to 10 hours
Suitable for Adult, pediatric and neonatal patient

PHOTIZO

Light therapy is a safe, non-invasive treatment which has proven to be effective for the treatment of

- Chronic pain & Arthritis
- Muscle Pain / Sports Injuries
- Anti Ageing
- Wounds and Skin Conditions

Photizo Pain



Photizo Pain Reliefs relieve pain and reduce swelling and inflammation especially in arthritic patients.

Also allows for quicker recovery of joint function following injury.

It is useful for treating pain and inflammation associated with joint diseases such as all types of arthritis and gout. Photize Pain Reliefs reduces muscle spasms, and increases the blood and lymph vessels diameter to ensure clearing of waste products and inflow of oxygen and nutrients in the area treated.

PHOTOTHERAPY

Infant



Equal light distribution
High intensity
Quiet, no noise of a fan
Five bulbfluorescent lights
The angle of head and height are adjustable
Steel support pole and four castors with brake
Integral timerto record therapy time

PHYSIOTHERAPY EQUIPMENT

(Catalogue available on request)

A wide variety available on request



PLASTER SAWS / CUTTERS

Hercules Electrical



Heavy duty blade: special hardening for synthetic cast material
High power
Overload system
Maximum durability
Maintenance free
Robust construction
Weight: 1.6kg
Voltage: 220V
150W motor, 14 000RPM and electronic suppressed

De Soutter



Low voltage saw operates at only 25dc
Two speed control on both saw and extractor
Quiet low speed setting is ideal for children, whilst high speed setting allows thick body casts to be cut quickly
Insulated rubber mounts reduce vibration to the operator's hand

PUMPS

INFUSION PUMP SP800



Bolus: 600ml/h
Flow rate range: 1-600ml/h
Volume limit: 1-9999 ml
Accuracy: $\pm 5\%$
KVO flow rate: 1ml/h, keep vein open KVO rate
Power supply: AC100-240V, 50/60 Hz, 25VA
Water Proof: IP *I
Battery: Rechargeable lithium polymer battery, 7.4 V, 1650mAh
Electrical safety: compliance with the requirements of IEC 60601-1.
Max. Power consumption: 25W

SYRINGE DRIVER SP500



Feasible injection rate range: 10ml: 0.1-100ml/h
20ml: 0.1-200ml/h
50ml: 0.1-500ml/h
Maximum power consumption: 25VA, running more than 5h after being fully charged.
Injection increment: 0.1ml/h
Injection accuracy: $\pm 3\%$
Bolus: The fastest rate of the size of syringe in use

REFRIGERATORS & FREEZERS

Minus 40 B200/40/220



Refrigerator and freezer
Length: 650mm
Height: 1 710mm
Ice pack freezing: 8kg / 24hrs
Temperature: 2 - 8°C (fridge), -12°C (freezer)
Capacity: 200 litre (fridge), 40 litre (freezer)
Holdover time: 48 hours to +10°C in 32° ambient temperature



MED 580 HD

Refrigerator and freezer
Length: 650mm
Height: 1 710mm
Ice pack freezing: 8kg / 24hrs
Temperature: 2 - 8°C (fridge), -12°C (freezer)
Capacity: 200 litre (fridge), 40 litre (freezer)
Holdover time: 48 hours to +10°C in 32° ambient temperature



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

Minus 40 MED1140SD



Width: 580mm
Depth: 635mm
Height: 1350mm
Capacity: 900litre
Temperature: 4°C
Holdover time: 4 hours to + 10°C in 32°C ambient temperature

Refrigerated mortuary cabinets



With a range of finishes and features to suit every budget, e.g. 3 or 6 tier
Easy to clean and maintain, featuring fully removable refrigeration system and stainless steel body trays
Cooler and freezer versions available

RESUSCITATORS

Adult



Capacity: 1600ml
With translucent face mask size: 3, 4 & 5
With guedel airway size: 2, 3, & 4
100% latex free



Child

Capacity: 500ml
With translucent face mask size: 1, 2, & 3
With guedel airway size: 0, 1 & 2
100% latex free

Infant



Capacity: 240ml
With translucent face mask size: 0 & 1
With guedel airway size: 00, 0 & 1
100% latex free

SCALES

MTB Baby and Toddler Scale



Cradle can be removed for weighing toddlers on the non-slip rubber mat
Simple user-friendly operation
Auto power off
Operates with AC adapter (included) or batteries (not included)
Lightweight and portable

Micro Digital Baby Scale



LCD display
Battery operated
Includes measuring tape
Appealing design
Capacity: 20kg x 10g

Micro Mechanical Baby Scale



Plastic baby sleeping tray
Clean dial reading
Advanced in structure and appearance
Dual chart for pounds or kilograms
Capacity: 20kg x 50g

Acuweigh Sliding Weight Scale



Makes weighing simple and fast
Height rod: 85 x 2 000mm
Platform size: 545 x 270mm
Capacity: 200kg x 100g

Adam MDW-300L & MDW-250L



The MDW-250L & MDW-300L features a large, clear LCD display, hold and tare function.
A height rod is included as standard, measuring in inch and centimeter
MDW-300L includes Body Mass Index
Calibration: external
Power supply: 12Vdc 500Ma adapter / internal rechargeable battery
Capacity: 250 x 0.1kg (MDW-250L) and 300 x 0.05kg (MDW-300L)

Adam CBK4



Durable construction and versatility make the CBK unmatched for value in industrial weighing.
Serving a variety of applications the CBK includes basic weighing, check weighing with LED limit indicators and parts counting.
Full featured and easy-to-use, the CBK is the right choice for industry when flexibility matters.
Reliable performance

Micro Chair Scale



Large clear LED display
Hold function
Rechargeable battery / mains operated
Wheels for easy movement
Adjustable arms & foot rest
Capacity: 300kg x 100g

Digital bathroom scales



4 Digit LCD display
Power: 2 x (3V CR2032) lithium batteries
Auto switch off in approx. 6 seconds
"LO" display for low battery
Capacity: 150kg x 100g

SPARE PARTS

A wide variety available on request



SPHYGMOMANOMETERS

Aneroid Pocket Set



Manual
Standard easy to fasten adult cotton velcro cuff (50cm x 14 cm)
Latex bag (22cm x 12cm)
Latex inflation bulb and air control valve in zippered pouch

Aneroid with Stand



Manual
Stand type aneroid (clock type)
Two piece stand column
Adjustable from 80cm-125cm
5 piece castors with breaks (more steady)
Velcro cotton cuff (50cm x 14cm) with 2 tube bladder (22cm x 12cm), with latex inflation bulb (with end valve), control valve and coiled tubing (±8ft)



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

Deluxe aneroid wall/desk blood pressure meter with square face



- Square shaped 145 mm diameter dial
- Front and rear adjustable for easy reading
- Aneroid gauge calibrated from 0mmHg to 300mmHg
- Navy blue washable adult size nylon cuff with D-ring
- 2-tube adult size cuff and bladder
- Standard latex bulb and inflation valve with spring
- PVC coiled tubing

BP METER ROSSMAX CH155F – UPPER ARM



Movement Detector
Real Fuzzy Technology
Hypertension Risk Indicator
Irregular Heartbeat Detector (IHB)
Average of last 3 readings
90 memories
One-touch automatic operation
Latex-free patented universal cone cuff

Mercury Desk Model



Manual
Easy to fasten adult cotton velcro cuff (50cm x 14 cm), latex bag (22cm x 12cm) with latex inflation bulb, air control valve and end valve
Leak proof mercury reservoir in die cast aluminium case

Mercury Wall Mounted – Flat



Manual
Die cast aluminium body, with easy to fasten adult cotton velcro cuff (50cm x 14 cm)
Latex bag (22cm x 12cm) with latex inflation bulb and air control valve and end valves
Coil tubing with connector and wire basket (to hold cuff , inflation bulb and valves)

SPIROMETERS

SpirOx



Colour TFT Display
Ultra-thin design for portable carrying, easy operation for convenient test
Large TFT screen to display the test result clearly
Measure FVC, PEF, FEV1 etc. and parameters synchronously
Support diagnosis evidence by volume and flow rate chart display
With precise, credible test result and good consistency
Communication with the computer with the USB (or Bluetooth), which can calculate data, analyze trend and export
Built-in lithium battery with battery power display

SpiroxPro



Measures Vital Capacity (VC), Forced Vital Capacity (FVC) and Maximum Ventilator Volume (MVV)
Adopting pressure-flow sensor, sensitive, precise, easy to launder, clean and durable
All parameters can be displayed on large screen (320x240)
Built-in memory, can store maximum 300 cases of patient measurement results
Calibrate automatically, all English operation, more convenient to operate
110mm thermal printer built-in, can print out a clear clinical report

STERILIZERS / AUTOCLAVES

Automatic Sterilizer SA-232



European Class N standard
Capacity: 16L
Overall dimensions: 600mm x335mm x430mm
Gross weight: 15.5 kg
Power supply: 230V/50~60Hz or 110V/50~60Hz
Power consumption: 230V/ 7amp heater 1400W
110V/ amp heater 1200W
Sterilizing temperature: 122°C
For wrapped and unwrapped solid instruments

Sturdy SA-232x



European Class N standard
Capacity: 16L
Overall dimensions: 501mm (W) x 406mm(H) x 537mm(D)
Chamber size: 230mmx410mm
Power consumption: 220V-240V/1.4KW (max.) / 7A – 110V/1.2KW (max.) 11A
Sterilizing temperature: 140°
For wrapped and unwrapped solid instruments

Runyes 12L / 22L



European Class B standard
3 Times vacuum preceding vacuum drying
Residual humidity is <0.2%
Vacuum measurement reaches -0.70bar
Sterilizing temperature: 121°C - 134°C
Water steam reaches every corner
It measures the penetration of water steam (installed with Bowie & Dick test)
For wrapped and unwrapped, solid and hollow instruments

STETHOSCOPES

Different types available on request



SUCTION UNITS



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

Askir 30



Mobile and portable with a weight of ± 3.6 kg
Also available as table device
Mains-powered device
Used for minor surgeries as well as nasal, oral and tracheal aspiration
Maximum 120 minutes operation time, then 60 minutes cooling time
Ideal for the home as it is light to transport
Satisfies all current norms and EU safety standards
Comes with a 1 litre autoclavable plastic collection jar, overflow valve, suction control, vacuum display, connection tube, suction catheter and antibacterial filter
The stand model comes with 2 x 2 litre autoclavable plastic collection jars

Askir C30



Easily portable equipment designed on stand with mobile castor wheels.
Intermittent duty cycle at 35°C and 110% operating voltage, 120 min ON / 60 min OFF
A series of LED's on the front control panel signals whether the machine is operating
Made of highly heat resistant, electrically insulated plastic material in conformity with the latest European safety standards
Supplied with a polycarbonate 2 x 2 litre autoclavable vessel complete with overflow valve
Equipped with aspiration regulator, located on the front panel

Hospivac 350



New Hospivac 350 is a surgical aspirator working with 230V ~ / 50 Hz network electricity
Four antistatic wheels with two brakes and a movement handle
Easily moveable and designed for virtually continuous use
The product is supplied with 2 x 2 litre polycarbonate autoclavable jars with overflow valve
Equipped with aspiration regulator and vacuum indicator located on the front panel
Power consumption: 230VA
Fuse 1 x 4 A 250V
ISO 10079-1 High Vacuum/High Flow
Maximum suction aspiration: -0.90 Bar
Maximum suction flow: 60 l/min
Dimensions: 460mm(l) x 600mm(h) x 420mm(w)

Gabler Mobile Electric High Vacuum Suction



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS



Robust, light-weight vacuum formed ABS housing
Sturdy, well-balanced and fully mobile on 5 castors
Routine maintenance free suction pump and motor
Fitted with a change-over switch for easy changing between bottles
Easy and reliable operation
Bacterial filters fitted to both inlets to the pump
Highly visible vacuum gauge located next to vacuum control
Maximum vacuum: -83kPa (625mmHg)
Suction capacity: 26 litres per minute
Collection jars fitted with 2 suction bottles, each with a capacity of 1800ml and graduated to 1500ml in 100ml steps
Dimensions approx.: 54cm (w) x 75cm (h) x 75cm (d)

Sms Wall Mounted Suction



Vacuum regulator: Pipeline operated 0-minus 100kPa
Steplessly controlled diaphragm
Diaphragm: Viton rubber with stainless high pressure spring
Gauge: 1/8th BSP Bottom entry, 0 minus 100 kPa
Vacuum Source Connection: 1/4 BSP Elbow with tailpiece
Inlet: 1/8th BSP Straight tailpiece 6mm for attachment to liner

THEATRE LIGHTS

Specifications available on request

STFocus-10E (Emergency UPS Type) STFocus-10M (Mobile Stand Type)



STFocus-10S

(Single Ceiling Lamp Head)



THEATRE TABLES & ACCESSORIES

OT-2000



The electro-hydraulic compact mechanism guarantees high operation safety and precise patient position. The table top divided into five sections with detachable complete mattress to provide high performance flexibility, the head and leg sections can be removed. A remote control with coiled cable drive for table height, lateral tilt, back and pelvis sections adjustment. In touching single soft key to automatic return table top to "0" horizontal position.

The table base is maneuverable and stable with moveable castors which can be rolled both longitudinally and lateral. An electro-hydraulic floor locking device controlled by remote control.

Equipped with optional UPS battery box supplying the energy for up to 100 operations.

Integrated into the table base is an electro-hydraulic system, the control system is special-designed with an overload protection device which prevents equipment damage by abnormal motor pump overload.

Most of the table and accessories are constructed by stainless steel.

THERMOMETERS

TS8 Series



Overall dimensions: 34mm (W) x 110.5mm (H) x 23.5mm (D)
Temperature Range: 10°C - 50°C
Functions: ear temperature, forehead temperature, ambient temperature and clock
Response time: ± 1 second
Waiting time: 0 seconds
Accuracy: ± 0.1 °C
4-digit LCD display
Battery: 3V lithium CR2032 battery

TS7 Series



Overall dimensions: 111.2mm (L) x 35.2mm (W) x 37.8mm (H)
Measuring range: 34°C - 43°C
Measuring accuracy: ± 0.2 °C
Less than 36°C or greater than 39°C
Display resolution: 0.1°C
Operating temperature: 16°C - 40°C with relative humidity up to 95%
Battery: 3V lithium CR2032 battery
4-digit LCD display

ULTRASOUND / SONAR

MD3203D (3D)



Features Literature Technical Gallery Main features
Freehand 3D and Image Optimization software packages
Full digital with latest ultrasonic imaging techniques and embed PC
Portable design, easy for carrying
Applicable for abdomen, gynaecology, obstetrics, cardiology, urology and small parts / organs
Supporting either video or laser printer
5 working modes: B, B/B, B/M, M and 4B
10" flash-free monitor, optional 10.4" medical LCD display
8 segment TGC
Permanent storage of 5,000 frames of ultrasound images

Isonic Ultrasound Monitor



17" LCD, high brightness, high resolution, wide view angle
256 elements, ZIP260 connector
Hard disk (500G)
2 USB ports
Dicom 3.0
Trolley
Control panel (exclude touch pad)
Software packages

URINE ANALYZER

Urine Analyzer



Advance and stable technology
Easy operation and maintenance
Large LCD screen

WHEELCHAIRS

- Different types available on request



X-RAY EQUIPMENT



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

X-Ray Viewing Box



Single: 465mm x390mm x135mm
Double: 465mm x610mm x135mm
Triple: 465mm x920mm x135mm
Quadruple: 465mm x1220mm x135mm

Please note that we are not restricted to
abovementioned equipment.



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS

CONTACT DETAILS

TEL 013 244 2119
FAX 086 528 7895
CELL 072 446 4043

STEFUS@AMORET.CO.ZA

3 BOSBERG CRESCENT,
AERORAND, MIDDELBURG,
MPUMALANGA, SOUTH AFRICA

POSTNET SUITE MW177
PRIVATE BAG X1838
MIDDELBURG, 1050

WWW.AMORET.CO.ZA



AMORET TRADING 68
LEADING THE WAY IN HEALTHCARE PRODUCTS